# High quality SBOMs for C/C++



Funded by





### The Problem

Compiled languages like C/C++ without a ecosystem package manager means that the tactics commonly used to build SBOMs in other ecosystems doesn't really work

(this includes a lot of important infrastructure today)

### The Problem

```
$ tar xvfz nginx-X.Y.Z.tgz
$ apt-get install -y build-essential libpcre3 libpcre3-dev zlib1g zlib1g-dev libssl-dev
$./configure
      --with-http_ssl_module \
      --with-http_gzip_static_module \
      --with-http_v2_module \
      --with-pcre \
      --with-file-aio \
      --with-threads
$ make
```

### Possible solutions

- Manually updated SBOM, maybe with the help of some internal tooling
- Retrofit a dependency manager into the project (vcpkg, conan)
- Instrument the test-suite
- Instrument the compiler and linker
- (Source SBOM)

## The Opinion

All tools that provide material to the finished artifact are potential attack vectors!

Which means that for security related use-cases SBOMs should probably include (with documented scope):

- Library dependencies
- Standard library & Runtime dependencies
- Compilers & Linkers

## The Challenge

- Minimal changes to the existing build system
- Reasonably exact i.e. we include all dependencies\*
- Support custom build configurations (i.e. optional modules)
- Document build tools used

### The Plan

- Watch all files the build process opens and executes to complete the build
- Attribute observed files to dependencies
- Report any files that can't be mapped
- Create an SBOM



## build-observer output

```
"start": "2025-03-24T14:08:58.975120568Z",
workingDirectory": "/usr/local/src/nginx-1.25.3",
"opened": [
 "/usr/include/crypt.h",
 "/usr/include/ctype.h",
 "/usr/include/openssl/asn1.h",
 "/usr/include/openssl/asn1err.h",
 "/usr/include/openssl/async.h",
 "/usr/include/openssl/asyncerr.h",
 "/usr/include/openssl/bio.h",
 "/usr/include/openssl/bioerr.h",
 "/usr/include/openssl/bn.h",
 "/usr/include/openssl/bnerr.h",
 "/usr/local/src/nginx-1.25.3/src/core/nginx.c",
 "/usr/local/src/nginx-1.25.3/src/core/nginx.h",
 "/usr/local/src/nginx-1.25.3/src/core/ngx_array.c",
 "/usr/local/src/nginx-1.25.3/src/core/ngx_array.h",
 "/usr/local/src/nginx-1.25.3/src/core/ngx_bpf.c",
 "/usr/local/src/nginx-1.25.3/src/core/ngx_bpf.h",
 "/usr/local/src/nginx-1.25.3/src/core/ngx_buf.c",
```

```
"executed": [
"/usr/bin/cc",
 "/usr/bin/ld",
 "/usr/bin/make",
"/usr/bin/sed",
 "/usr/lib/gcc/x86_64-linux-gnu/12/cc1",
 "/usr/lib/gcc/x86_64-linux-gnu/12/collect2"
```

## Creating an SBOM

- We now have a logfile of syscalls (opens, and executions)
- Lookup which (OS) package each file belongs to
  - Optionally track transitive dependencies (depending on use case)
- Create a dependency tree
- Output an SBOM

## Mixed language applications

- Applications built from a mix of languages, like Javascript or Python, mixed with C/C++
- Make sure to observe the complete build, including installing dependencies
- Force recompilation of dependencies (you should already be doing this)
- Merge build-observer SBOM with dependencies for the other ecosystem
- Works surprisingly well!

### **Current Status**

#### Production Ready


- Support for Debian and RPM based build machines
- Tested on a growing number of real-world projects

#### Work in progress

- Support for Git dependencies
- Support for vendored dependencies
- Alpine (APK) support
- Windows\* and FreeBSD support

### Resources

- Find me
  - andreas@sbom.observer
  - https://www.linkedin.com/in/andreas-bielk/
- Day job
  - https://sbom.observer/
  - Consulting
- Source Code
  - https://github.com/sbom-observer/build-observer
  - <a href="https://github.com/sbom-observer/observer-cli">https://github.com/sbom-observer/observer-cli</a>
  - https://github.com/sbom-observer/observer-benchmarks

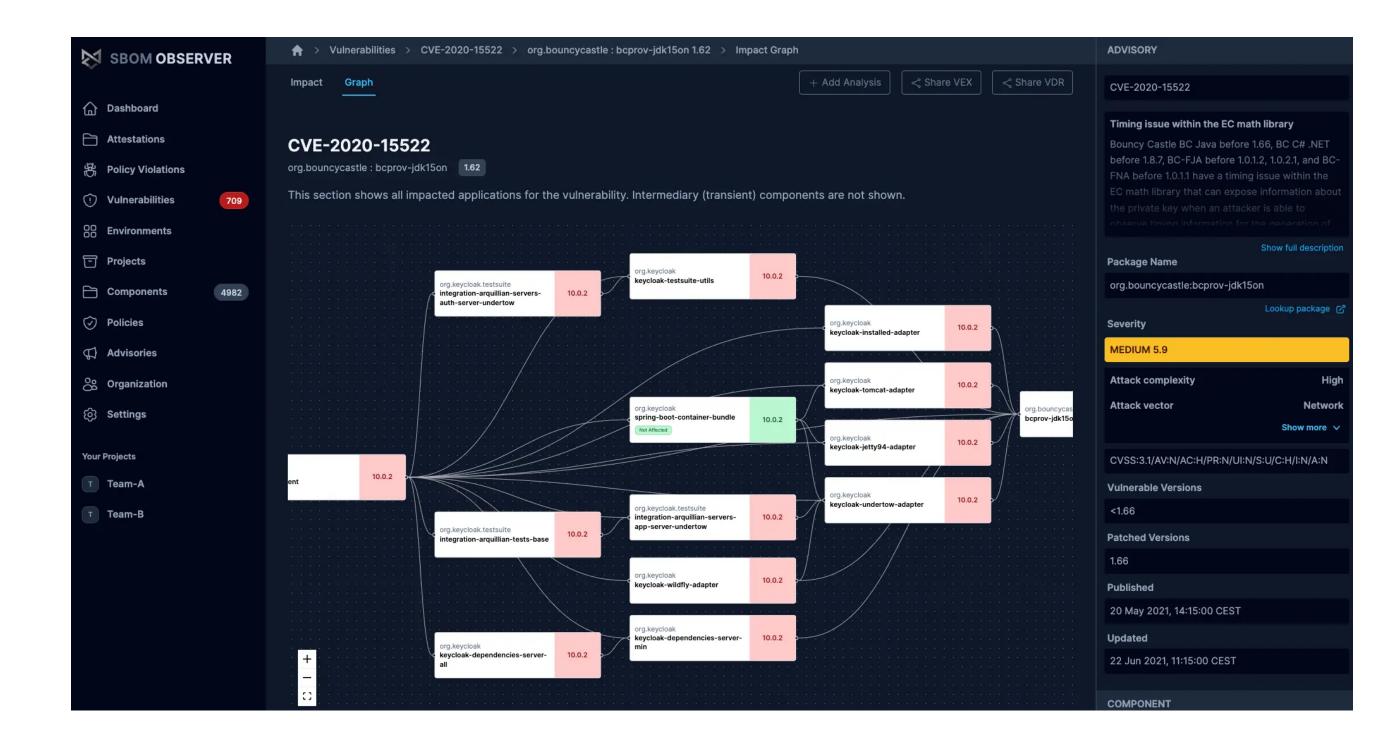





#### Funded by






### Extra Slides


### eBPF

"eBPF is a revolutionary technology with origins in the Linux kernel that can run sandboxed programs in a privileged context such as the operating system **kernel**.

It is used to **safely** and **efficiently** extend the capabilities of the kernel without requiring to change kernel source code or load kernel modules."

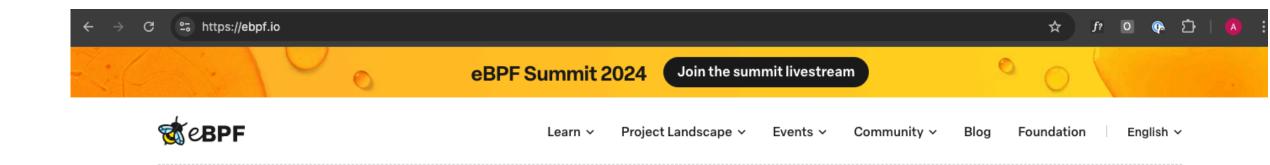

### Dynamically program the kernel for efficient networking, observability, tracing, and security

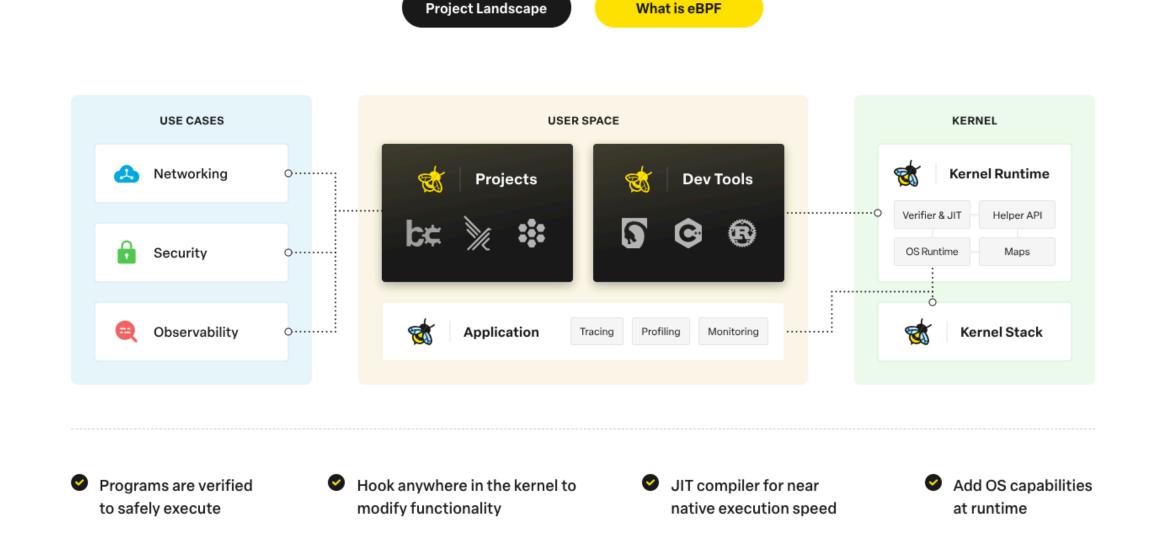

### eBPF is fast

- Instrument kernel to observe all opened and executed files (syscalls)
- 10% build time overhead (~30 sec added for 5 min Asterisk build)

\$ sudo build-observer --user cicd -- make -f Makefile.linux build-examples

## Example: nginx

- 14 source dependencies
- 3 tool dependencies
- 51 transitive dependencies
- 0 unattributed dependencies

## Example: npm (Javascript)

- 7 (debian) + 59 (npm) source dependencies
- 4 tool dependencies
- 49 transitive dependencies
- 0 unattributed dependencies

```
"name": "npm-with-native-dependencies",
"version": "1.0.0",
"dependencies": {
 "leftpad": "^0.0.1",
 "bcrypt": "5.1.1" <— contains C++ cod
```

```
$ sudo observer build —user cicd — npm install --build-from-source --no-progress
```

## Library Dependency

```
"type": "library",
"name": "libcodec2-dev",
"version": "1.0.5-1",
"purl": "pkg:deb/debian/libcodec2-dev@1.0.5-1?arch=amd64&distro=debian-12.5",
"licenses": [
  "license": {
   "id": "LGPL-2.1-or-later"
  "license": {
   "id": "BSD-3-Clause"
```

## Compiler Dependency

```
"type": "application",
"scope": "excluded",
"name": "cpp-12",
"version": "12.2.0-14",
"purl": "pkg:deb/debian/cpp-12@12.2.0-14?arch=amd64&distro=debian-12.5",
"components": [
  "type": "file",
  "name": "/usr/lib/gcc/x86_64-linux-gnu/12/cc1",
  "hashes": [
    "alg": "SHA-256",
    "content": "a9d27bdb13cfcae82035677c84a28ad3b35fd5e6b3f5e19060d3ba1a69f3c3fe"
```